



## Product Description

**Evershield-303** is a two component, 100% solids, odorless, aliphatic polyurethane coating. This product exhibits fast dry time with adequate working time to be applied by brush and roller. It is recommended for areas where a high build coat is desired over colored coatings, vinyl flakes, or quartz broadcast systems. **Evershield-303** is UV stable, providing long-term gloss retention and resistance to yellowing. It also provides superior abrasion and chemical resistance with a crystal-clear glossy finish.




## Areas of Application

**Residential Use** - Entrances and hallways; Basements; Entertainment rooms; Bathrooms; Kitchens and living rooms; Outdoors spaces and pool outlines.

**Commercial Use** - Shopping malls and boutiques; Hotels; Offices; Showrooms; Restaurants; Hospitals; Schools; Community centers.

**Industrial Use** - Garages; Warehouses; Airports and hangars; Processing and manufacturing plants.

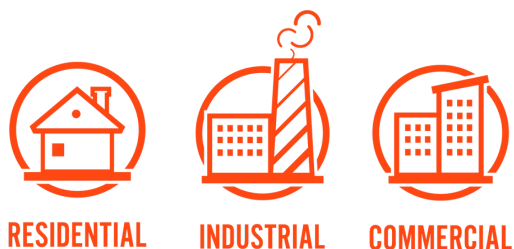

## Environmental Approvals / Certificates

- Meets CFIA and USDA requirements for indirect food contact / use in food plants.
- Conforms with LEEDv4 EQ credit: Low emitting materials SCAQMD Method 304-91 for architectural coatings.
- VOC content <5 g/L

## Packaging and Recommended Thickness

**Evershield-303** is offered in the following kit sizes:  
2-gallon kit 3.78L resin (A) and 3.78L hardener (B)

Available in clear.

Color pigment packs are offered in 16 oz jars (1 jar / 2-gallon kit)

### Recommended Film Thickness / Coverage

10-12 mils / 267-320 sq. ft. / per 2-gallon kit

## Product Properties

| Working time on substrate: | 25-30 minutes<br>21°C / 70°F @50% relative humidity |             |             |
|----------------------------|-----------------------------------------------------|-------------|-------------|
| Curing Schedule            | 10°C (50°F)                                         | 20°C (68°F) | 30°C (86°F) |
| Recoat (max. 48 hrs)       | 4-6 hrs.                                            | 2-4 hrs.    | -2 hrs.     |
| Foot traffic               | -6 hrs.                                             | -3-6 hrs.   | -3 hrs.     |
| Vehicular traffic          | -24-36 hrs.                                         | -1 day      | -1 day      |
| Full Chemical Cure         | -10 days                                            | -7 days     | -5 days     |

## Product Application

Apply using a rubber squeegee and back roll using a fine quality 10 mm roller to obtain a uniform coating. Clean equipment with appropriate solvent. Once the product has hardened, it may only be removed mechanically.

Curing times are subject to variations determined by the ambient conditions, including air and substrate temperature, as well as relative humidity. It is imperative to shield the coating from moisture, condensation, and direct water exposure during the initial 24-hour curing period. If the recommended recoating time has exceeded 48 hours, it becomes necessary to sand the prior coat using a screed mesh to eliminate any glossy finish. Moreover, thorough cleaning by vacuuming is essential to eradicate any dust particles. The surface should exhibit a consistent matte appearance, entirely devoid of any gloss, following the cleanup process, before proceeding to apply the next coat.





## Surface Preparation

Remove dust, dirt, grease, oil, and all other contaminants with proper cleaner/degreaser. Prepare the surface mechanically as per ICRI-CSP2 profile by diamond grinding to ensure removal of laitance, curing agents and sealers. The compressive strength of a newly poured concrete substrate must be at least 25 MPa (3635 psi) after 28 days of cure and at least 1.5 MPa (218 psi) tensile strength. **Be careful with condensation (at least 3 degrees above dew point).** All cracks, holes and irregularities must be repaired with a crack filler prior to applying the coating.

## Mixing Instructions

Empty container A (resin) and container B (hardener) into a large mixing pail. Mechanically mix the combined product for a maximum of 1 minute using a low-speed drill (300-450 rpm) to reduce air entrapment and to obtain a homogeneous mixture. Once the product is mixed proceed to application instructions. **Do not let the product sit in the container as it will rapidly start to react and cure.**



MIX A&B



LOW SPEED

## Technical Properties

|                                            |                                                                                                                      |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Viscosity ASTM D445-06                     | Part A Resin 300-400 cps.<br>Part B Hardener 400-450 cps.                                                            |
| Solids by weight                           | 100 %                                                                                                                |
| Abrasion Resistance, ASTM D4060            | Taber abraser CS-17 calibre wheel<br>1000 cycles/1000 g = 0.03-gram loss                                             |
| Elongation @ Break, ASTM D638              | 10% at break                                                                                                         |
| Tensile strength, ASTM D638                | 3,500 psi.                                                                                                           |
| Pull-Off Strength, ASTM D7234              | > 400 psi (substrate failure)                                                                                        |
| Coefficient of Friction, ASTM E303-93 DCOF | -0.42 wet (smooth high gloss)<br>-0.99 dry (smooth high gloss)                                                       |
| Koing Pendulum Hardness ASTM D4366         | 175 sec @ 10 mils.                                                                                                   |
| VOC, ASTM D2369                            | < 5 g/L                                                                                                              |
| Gloss, ASTM D523                           | 90.5 GU @ 60°                                                                                                        |
| Shelf life                                 | 1 year when stored in original, unopened packaging. Store dry at temperatures between 15°C to 30°C (59 °F to 86 °F). |

## Product Restrictions

- **Not recommended for application at temperatures below 5°C / 41°F or above 30°C / 86°F.** An application below/above these temperatures will result in decreased product workability and cure times.
- Ambient humidity of the surroundings should not exceed 85% during application and during curing process.
- The substrate temperature must be at least 3°C (5.5°F) above measured dew point.
- Humidity content of substrate must be < 4% at time of application.
- Do not apply on porous surfaces where a transfer of humidity may occur during the application.
- Freshly applied product must be protected against moisture, condensation, and water for at least 48 hours.
- **Rubber burns caused by quick stops or starts on coating can cause permanent marking. Rubber tires can permanently stain the coating due to plasticizer migration.**
- Direct-fired gas or kerosene heaters produce byproducts that can affect the curing process and must be turned off or properly exhausted.

## Disclaimer and Warranty

Everflow® warrants that our products are free from manufacture defects in accordance with our quality control procedures. Any products proven defective are limited to the replacement of defective products or refund of the purchase price as determined by Everflow®. Please contact your local Everflow® sales representative for more information and warranty requirements.

The information and recommendations contained in this technical data sheet are based on reliable test results according to Everflow®. The data mentioned are specific to the material indicated. If used in combination with other materials, the results may be different. It is the responsibility of the user to validate the information therein and to test the product before using it. Everflow® assumes no legal responsibility for the results obtained in such cases. Everflow® assumes no legal responsibility for any direct, indirect, consequential, economic or any other damages except to replace the product or to reimburse the purchase price, as set out in the purchase contract.

